

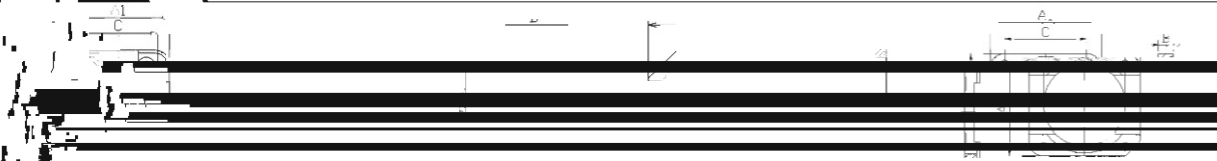


镍锌材料规格与尺寸 NiZn Material Specifications and Dimensions

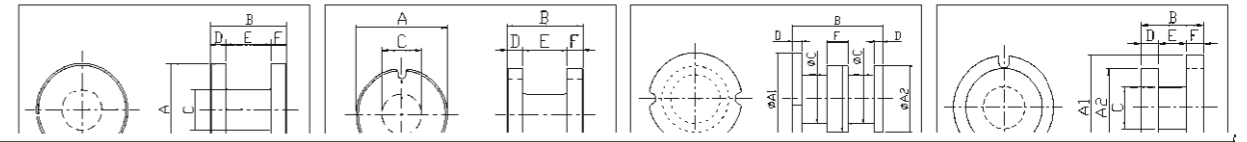

Part No.	φA1	φA2	A	B	C	Notes
RF-22-0.5-100	1.50±0.02	1.50±0.02	10.0±0.1	1.0±0.05	1.0±0.05	A
RF-22-0.5-150	1.50±0.02	1.50±0.02	15.0±0.1	1.0±0.05	1.0±0.05	A
RF-22-0.5-200	1.50±0.02	1.50±0.02	20.0±0.1	1.0±0.05	1.0±0.05	A
RF-22-0.5-250	1.50±0.02	1.50±0.02	25.0±0.1	1.0±0.05	1.0±0.05	A
RF-22-0.5-300	1.50±0.02	1.50±0.02	30.0±0.1	1.0±0.05	1.0±0.05	A
RF-22-0.5-350	1.50±0.02	1.50±0.02	35.0±0.1	1.0±0.05	1.0±0.05	A
RF-22-0.5-400	1.50±0.02	1.50±0.02	40.0±0.1	1.0±0.05	1.0±0.05	A
RF-22-0.5-450	1.50±0.02	1.50±0.02	45.0±0.1	1.0±0.05	1.0±0.05	A
RF-22-0.5-500	1.50±0.02	1.50±0.02	50.0±0.1	1.0±0.05	1.0±0.05	A

Part No.	φA1	φA2	A	B	C	D	E	F	Notes
RF-22-0.5-100	1.50±0.02	1.50±0.02	10.0±0.1	1.0±0.05	1.0±0.05	0.5±0.02	0.5±0.02	0.5±0.02	A
RF-22-0.5-150	1.50±0.02	1.50±0.02	15.0±0.1	1.0±0.05	1.0±0.05	0.5±0.02	0.5±0.02	0.5±0.02	A
RF-22-0.5-200	1.50±0.02	1.50±0.02	20.0±0.1	1.0±0.05	1.0±0.05	0.5±0.02	0.5±0.02	0.5±0.02	A
RF-22-0.5-250	1.50±0.02	1.50±0.02	25.0±0.1	1.0±0.05	1.0±0.05	0.5±0.02	0.5±0.02	0.5±0.02	A
RF-22-0.5-300	1.50±0.02	1.50±0.02	30.0±0.1	1.0±0.05	1.0±0.05	0.5±0.02	0.5±0.02	0.5±0.02	A
RF-22-0.5-350	1.50±0.02	1.50±0.02	35.0±0.1	1.0±0.05	1.0±0.05	0.5±0.02	0.5±0.02	0.5±0.02	A
RF-22-0.5-400	1.50±0.02	1.50±0.02	40.0±0.1	1.0±0.05	1.0±0.05	0.5±0.02	0.5±0.02	0.5±0.02	A
RF-22-0.5-450	1.50±0.02	1.50±0.02	45.0±0.1	1.0±0.05	1.0±0.05	0.5±0.02	0.5±0.02	0.5±0.02	A
RF-22-0.5-500	1.50±0.02	1.50±0.02	50.0±0.1	1.0±0.05	1.0±0.05	0.5±0.02	0.5±0.02	0.5±0.02	A

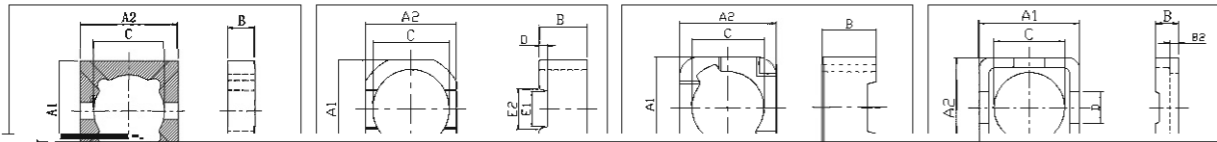

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]