




/Material:

/Features:

1. / Low Core Loss and High Saturation Flux Density
2. / Higher Curie Temperature

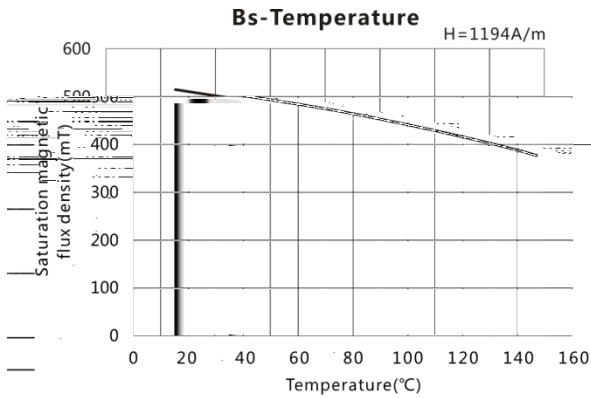

Initial permeability	$\mu_i$	25°C	1500±25%
Saturation magnetic flux density	$B_s$ (mT)	25°C	510
flux density		100°C	440
Remanence	Br(mT)	25°C	210
		100°C	70
Coercivity	Hc(A/m)	25°C	24
		100°C	13
Core loss	Pcv(kW/m <sup>3</sup> )	25°C	1000
		100°C	480
Curie temperature	Tc(°C)		≥285
Electrical resistivity	$\rho$ ( $\Omega$ -m)		3
Density	d(kg/m <sup>3</sup> )		4.8×10 <sup>3</sup>

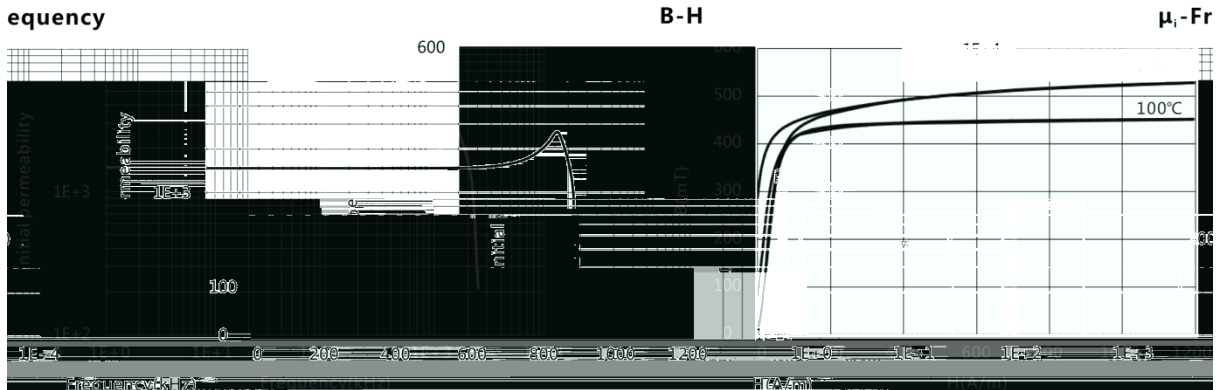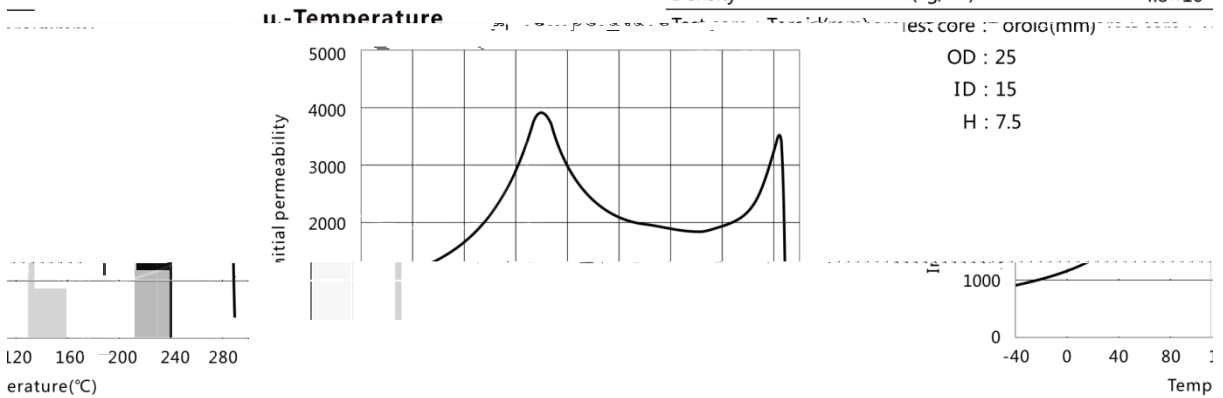

/Material:

